


# Russound®

## ADP-1.2 Speaker-Level to Line-Level

### Instruction Manual

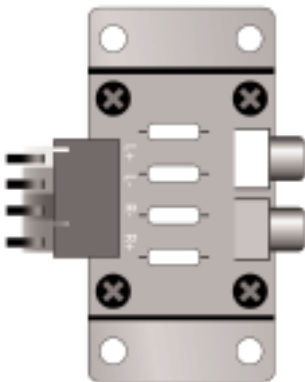

## Product Overview

The ADP-1.2 speaker-level to line-level interface attenuates speaker-level audio from a stereo receiver or amplifier to create a line-level signal. This line-level signal can then be fed to a high-powered amplifier for those applications requiring greater power.

## Connection Instructions

Connect the speaker-level outputs of the stereo to the detachable input connector of the ADP-1.2 using a four-conductor speaker wire. Using RCA cables, connect the left and right outputs to the line-level inputs of the high-powered amplifier. See Figure 1.

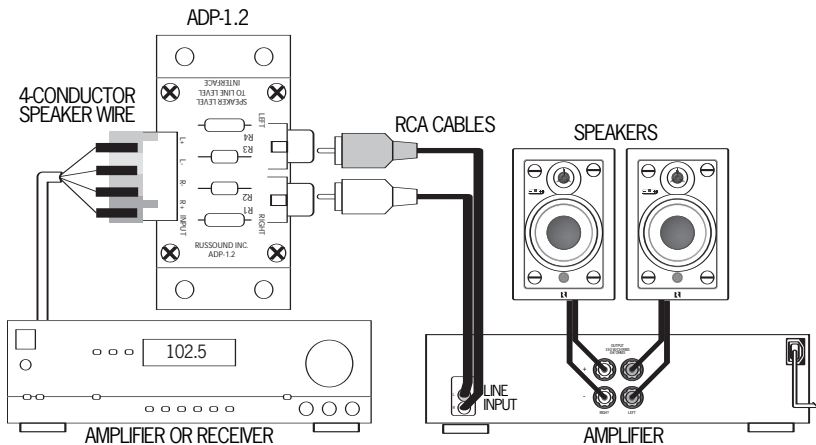


Figure 1

## Mounting

Mount the ADP-1.2 using the two mounting brackets. Be sure that the bottom of the circuit does not rest against the mounting surface. See side view of ADP-1.2 in Figure 2.

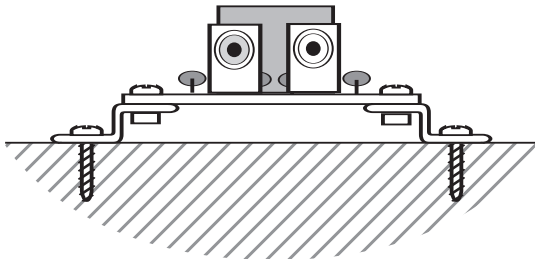


Figure 2

## Technical Information

Power: 250 W/ch RMS continuous  
500 W/ch peak

Attenuation: -30dB

Input Connector: Screwless removable snap connector

Wire Size: Up to 14-gauge wire

Output Connectors: RCA female

Dimensions: 2-1/2 x 3-3/4 inches

## Warranty

The Russound ADP-1.2 is fully guaranteed against all defects in materials and workmanship for ten (10) years from the date of purchase. During this period, Russound will replace any defective parts and correct any defect in workmanship without charge for either parts or labor. For this warranty to apply, the unit must be installed and used according to its written instructions. If service is necessary, it must be performed by Russound. The unit must be returned to Russound at the owner's expense and with prior written permission. Accidental damage and shipping damage are not considered defects, nor is damage resulting from abuse or from servicing by an agency or person not specifically authorized in writing by Russound. This Warranty does not cover: Damage caused by abuse, accident, misuse, negligence, or improper installation or operation; Power surges and lightning strikes; Normal wear and maintenance; Products that have been altered or modified; Any product whose identifying number, decal, serial number, etc. has been altered, defaced or removed.

Russound sells products only through authorized Dealers and Distributors to ensure that customers obtain proper support and service. Any Russound product purchased from an unauthorized dealer or other source, including retailers, mail order sellers and online sellers will not be honored or serviced under existing Russound warranty policy. Any sale of products by an unauthorized source or other manner not authorized by Russound shall void the warranty on the applicable product.

Damage to or destruction of components due to application of excessive power voids the warranty on those parts. In these cases, repairs will be made on the basis of the retail value of the parts and labor. To return for repairs, the unit must be shipped to Russound at the owner's expense, along with a note explaining the nature of service required. Be sure to pack the unit in a corrugated container with at least three (3) inches of resilient material to protect the unit from damage in transit.

Before returning a unit for repair, call Russound at (603) 659-5170 for a Return Authorization number. Write this number on the shipping label and ship to: Russound, ATTN: Service, 5 Forbes Road, Newmarket, NH 03857



5 Forbes Rd. Newmarket, NH 03857  
Tel 603.659.5170 • Fax 603.659.5388  
e-mail: [tech@russound.com](mailto:tech@russound.com)